

## CAD-026C

Intel Denverton-NS Platform.  
 SD-WAN And Security Fanless  
 Desktop Solution.




- Intel Atom Processors C3000 Series
- 2 x DDR4 ECC SO-DIMM (Up to 256GB)
- 2 x 10GbE and 6 x GbE Ports
- Support Wi-Fi and LTE Wireless Communication ADSL/VDSL/G. Fast Module (VRX350 + VRX619)
- TPM (Trust Platform Module) Support

## Specifications


<b>Model Name</b>	
<b>Platform</b>	
<b>Processor</b>	1 x Intel Atom C Processor (Denverton-NS)
<b>Chipset</b>	N/A
<b>System Memory</b>	2 x DDR4 ECC 2400MHz SO-DIMMs
<b>Max Memory</b>	Up to 256GB
<b>Ethernet Port</b>	6 x RJ45 GbE Port(s) on board, 2 x SFP+ 10GbE Port(s) on board
<b>Bypass</b>	N/A
<b>Expansion</b>	Up to 1 mPCIe Slot for Wi-Fi Module, up to 1 M.2 Slot for 4G LTE Module, 1 x PoE+ Module, 1 x ADSL/VDSL/G.Fast Module
<b>Storage Device</b>	1 x SATADOM, 1 x 2.5" SATA HDD/SSD
<b>Power Supply</b>	60W Adapter
<b>Dimension (WxDxH)</b>	250mm x 252mm x 44mm (10" x 10.08" x 1.76")
<b>Weight (Kg)</b>	-
<b>I/O</b>	
<b>Management Console</b>	1 x RJ45 System Console Port, 1 x Micro USB Console Port
<b>USB Port</b>	2 x USB 3.0 Port(s)
<b>Display Output</b>	N/A
<b>LCD Panel</b>	N/A
<b>LED</b>	Power / Ethernet / RSSI / Wi-Fi / PoE

<b>LOM</b>	N/A
<b>Operations &amp; Certifications</b>	
<b>Operating Environment</b>	Temperature: 0 - 40°C (32 - 104°F), Humidity: 20 - 90% RH
<b>Storage Environment</b>	Temperature: -10 - 70°C (14 - 158°F), Humidity: 5 - 95% RH
<b>Certification</b>	CE / FCC / VCCI / RCM / CB of IEC60950-1 / CB of IEC60950-1 / Jate / UL NoA (UL62368-1)
<b>OS Support</b>	Linux

## Front I/O

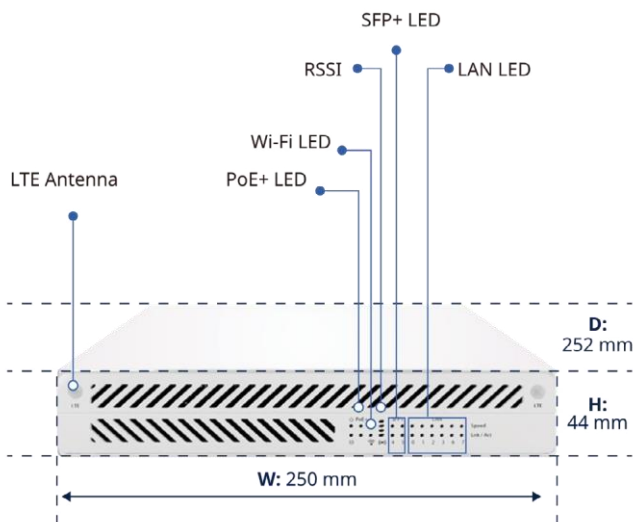

## Back I/O

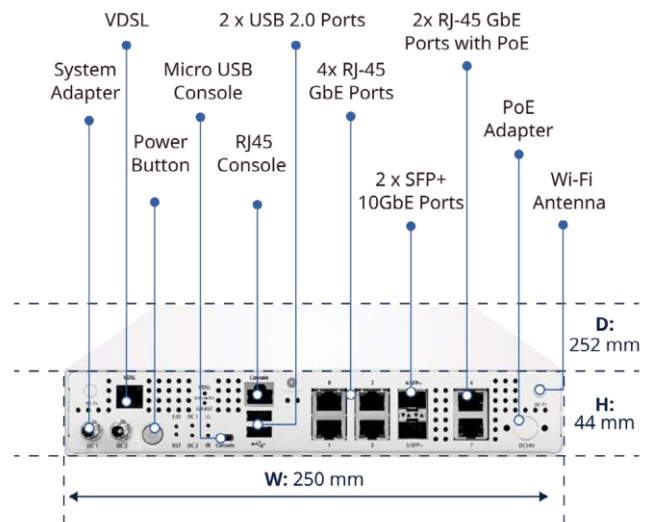

## Ordering Information

System	
SKU	Description
CAD-026C	Desktop, 1 x Intel Atom C, 2 x DDR4 ECC SO-DIMMs, 6 x RJ45 GbE, 2 x SFP+ 10GbE, 60W Adapter

Optional CPUs			
Model	Core/Thread	Frequency (Max.)	TDP
Intel Atom C3558	4C/4T	2.2 GHz (2.2 GHz)	16W
Intel Atom C3758	8C/8T	2.2 GHz (2.2 GHz)	25W