

MD-121R



- 12.1" 1024x768(XGA 4:3) Resolution
- Wide Operating Temperature (-30~70° C)
- Metal Cabinet with Diverse Installing Options
- Made in Taiwan, 3 Years Warranty
- Designed for All Environments
- High Brightness Option
- AG/AR/AF Film Options

I/O Interfaces

Standard	VGA x1, DVI x1
Audio Input	TRS connector 3.5mm of stereo x1
Speaker	2W x2

Mechanical

Cabinet	Galvanized steel (SECC)
Dimension (Max)	270x212.9x39.9 mm
Wall Mount Hole	75x75 mm
Net Weight	≤ 2.5 KG

Power

Power Input	DC-12V, with AC/DC Adapter 100~240V
Power Connector	DC Jack Φ2.1mm

Environmental

Operating Temperature	-30-70°C
-----------------------	----------


General

Screen Diagonal	12.1 inch
Display Area	245.76x184.32 mm
Resolution	1024x768 (XGA)
Brightness(nits)	500
Contrast Ratio	700:1
Display Ratio	4:3
Support Color	16.2M Color
Pixel Pitch	0.24x0.24 mm
Response Time	11 msec
Backlight Unit	LED (white LED)
Viewing Angle (L/R,U/D)	160° /140° (CR ≥ 10)
Backlight Life Time	30000 HRS
Surface Treatment	Anti-glare, Hardness 3H

Option

Brightness	1000/1500
Surface Film Options	AFP(Anti-Fouling/Fingerprint)/AR(Anti-Reflective)/AS(Anti-Spy)
Cabinet Options	Stainless Steel/Aluminum

Dimensions

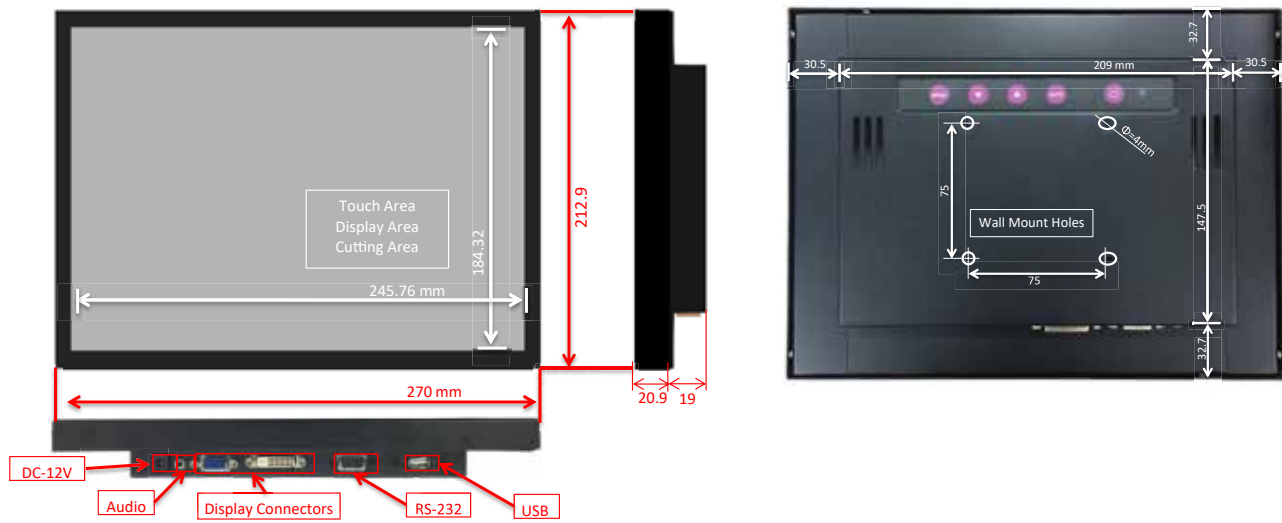

Ordering Information

Monitor

Model Number	AL8-3042
Description/Configuration	12.1" 1024x768(XGA 4:3)/Industrial Touch Display/5 Wire Resistive Touch/VGA/DVI



Tel: +886-2-7739-5566
Fax: +886-2-7715-0609
Mail: info@Mitwell.com.tw
Address: No.55, Ln. 6, Chenglin Rd., Tucheng Dist., New Taipei City 236, Taiwan (R.O.C.)